



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)


NOTES:

- Current Rating: 5.0AMP
- Contact Resistance: 25mΩ Max
- Withstand Voltage: 1000V AC/DC
- Insulation Resistance: 5000MΩ Min
- Operation Temperature: -55°C to +105°C


- Contact Material: Brass
- Contact plating: Au Or Sn over Ni
- Insulator Material: PBT+30%G.F UL94V-0
- Shell Material: Spcc, Plating: Ni Plated
- Rivet/Harpoon: Brass, Sn over Ni
- Screw: Brass, Plating Ni Plated

Ordering Information

6200-X 09 M X 09 M X XX X X
 Dim of Dual Port Center A=15.88mm Center B=19.05mm
 Up Port Type Up Port Color Down Port Type
 F=Female B=Black F=Female M=Male
 U=Blue U=Blue M=Male N=Green
 Down Port Color
 B=Black Contact Plating: U=Blue N=Green
 S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin
 Bracket Material
 0=Zinc Alloy I=SPCC

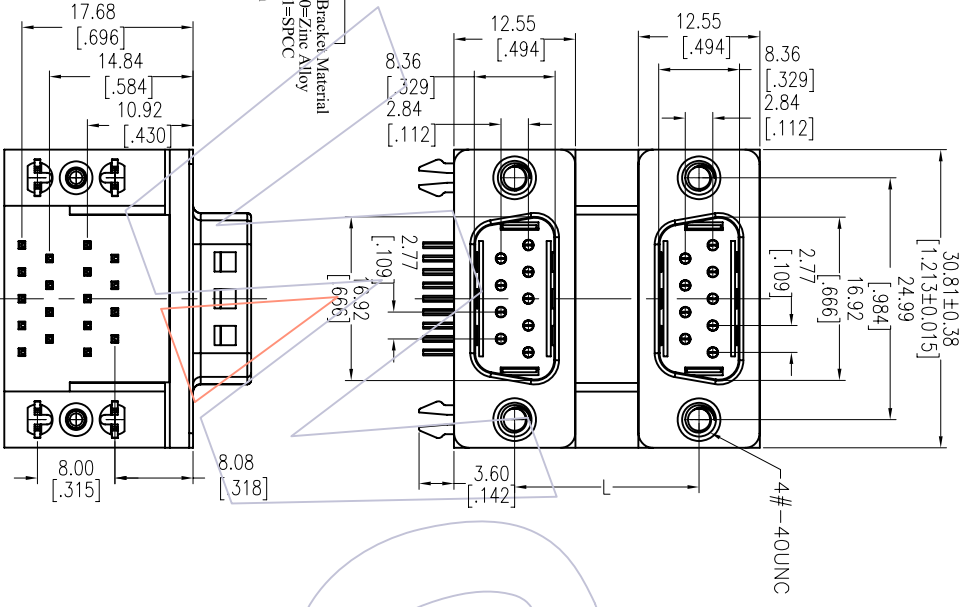


6200-X09MX09MXX11(WITH-OUT SCREW)

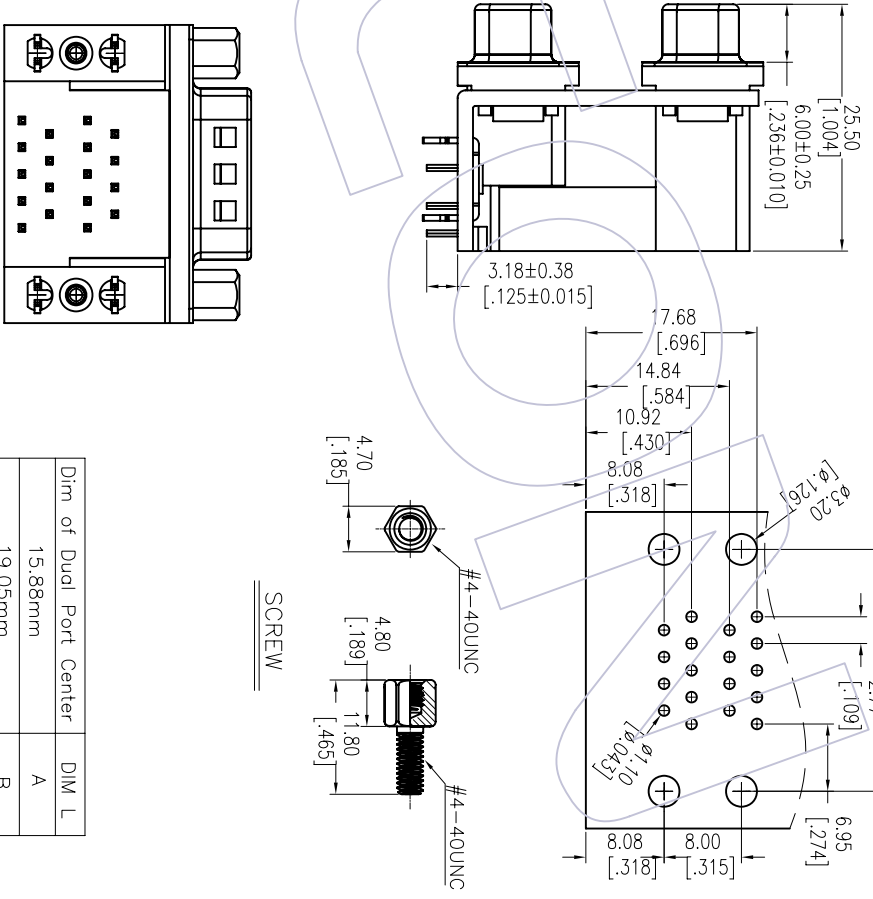

6200-X09MX09MXX12(WITH SCREW)

Dim of Dual Port Center	DIM L
15.88mm	A
19.05mm	B

SCREW

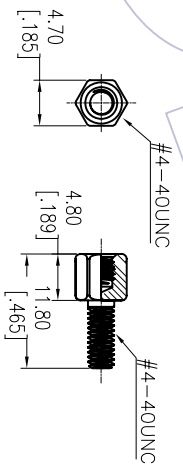

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/12/27	NEW	-----

OPERATION	DRAW	DATE
XX ±0.40	JYHuang	2012/12/27
XX ±0.25	CHECK	DATE
XX ±0.15	CHECK	DATE
Angle ± 3'	APPROVE	DATE
DIM TOL		

SCALE	FIT	PART NO.
UNIT mm	A4	6200-X09MX09MXXXXX
SIZE A4	1/1	TITLE: D-SUB Right Angle Connector
SHEET 1/1		Dial I Row
PROJ.		Customer NO.



WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com

Http: www.wcon.com