

HSF

NOTES:

Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C


Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: LCP+30%G.F UL94V-0

Ordering Information

3221-XX S XX B S T 1

No. of Pins	Contact Plating	Insulator Color	Packing
06 30	G0=Gold Flash	B=Black	A=Tray
08 34	G3=10u"Gold	U=Blue	T=Tube
10 40	G4=15u"Gold	G=Grey(427C)	
14 44	G5=30u"Gold	E=Grey(413C)	
16 50	S0=Gold Flash/Tin		
20 60	S3=10u"Gold/Tin		
24 64	S4=15u"Gold/Tin		
26	S5=30u"Gold/Tin		
	SN=Tin		

Item	Pitch	Mating
Standard	2.00	5225
Alternate		

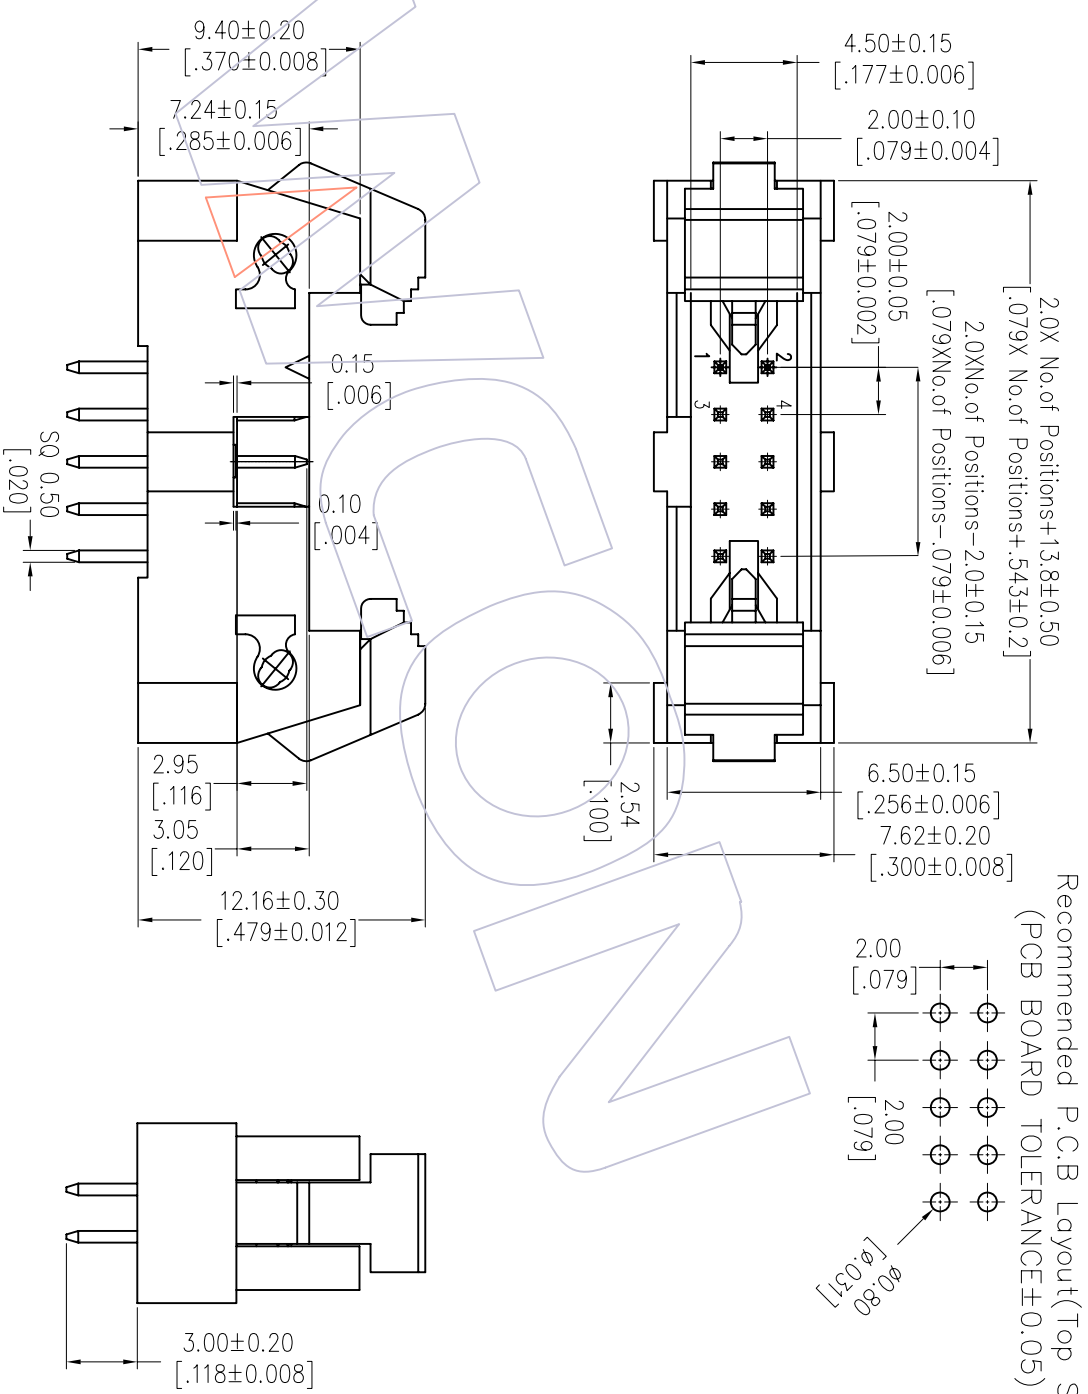

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	SHEET	PROJ.	PART NO.	TITLE:	Customer NO.	WCON-Dongguan	WCON-Kunshan
A0	2012/10/08	NEW		Angle	± 3'	JYHuang	2012/10/08	1/1		3221-XXXXBST1	2.0 Ejector Header "S" Type 180°		Http: www.wcon.com	Tel: +86 512 57468408
						CHECK	DATE	A4					Tel: +86 769 85358920	Tel: +86 512 57468408
						APPROVE	DATE	1/1					Fax: +86 769 85358915	Fax: +86 512 57468468
													E-mail: sales@wcon.com	E-mail: sales@wcon.com

WCON

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com